


oventrop

Stainless Steel Manifold for Radiant Floor Systems

- 1" Stainless Steel Manifolds with In-line Flow Meters 0.4 - 1.2 gpm, with isolating capability
- (2) Fill and Drain Valves
- (2) 1" Sweat Tail pieces
- (2) Sound Isolating Brackets

Available for connection to 2 to 12 loops
1" Female Union connections
3/4" Male (R 20) loop connections
Maximum operating temperature 200 °F
Maximum operating pressure 90 psi



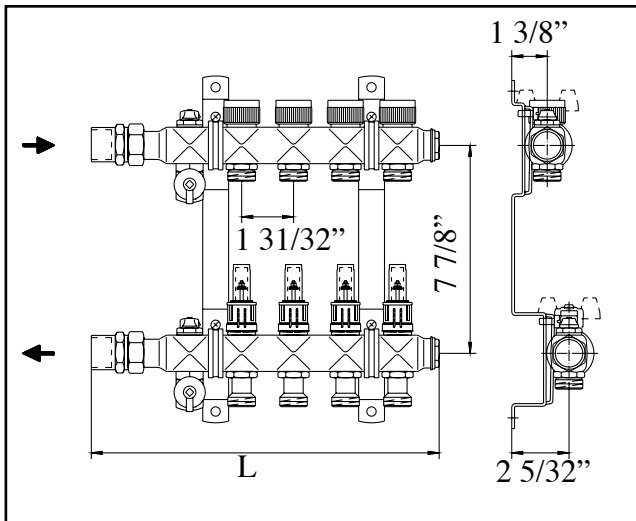

# of Loops	Length inches	Item number
2	9-5/16	140 41 72
3	11-5/16	140 41 73
4	13-1/4	140 41 74
5	15-1/4	140 41 75
6	17-3/16	140 41 76
7	19-3/16	140 41 77
8	21-1/8	140 41 78
9	23-1/8	140 41 79
10	25-1/16	140 41 80
11	27-1/16	140 41 81
12	29	140 41 82

Overall dimensions including sweat tails

Accessories:

Part #

101 24 96

24 V Actuator, 2 Watts,
Normally Closed, 4 Wire



Sweat tailpiece

140 70 08 1"
If purchased separately

BSP/sweat



Coupling nickel plated

140 72 06 3/4" x 1" BSP/BSP
Connects (2) manifolds. Max. # of loops not to exceed (12).



Sweat tailpiece with thermometer

140 98 06 1" BSP/sweat




Double feed adapter

140 71 06 3/4" x 1" BSP/NPT
To feed manifold from both sides.



"Euroconus" Compression fittings

164 68 49 US-PEX 3/8" (100) sold in pairs
164 68 50 US-PEX 1/2" (100) sold in pairs
164 68 51 US-PEX 5/8" (100) sold in pairs



101 68 44 Copper 1/2" (100) sold in pairs
101 68 64 Copper 1/2" (100) sold in pairs

